

INSKY, B. V.

6.5-327
Kuznetsov, E. S. and Ovchinnikov, B. V. Resultaty chislennogo resheniya integral'nogo uravneniya teorii Rayleigha sveta v atmosfere. [Numerical solution of integral equation of the theory of Rayleigh scattering in the atmosphere.] Akademiya Nauk SSSR. Geofizicheskii Institut, Trudy, No. 4(131), 1942. 165 p. numerous tables, refs., eqs. DLC- This work presents the first part of extensive investigations on the applications of the theory of light scattering in the atmosphere. It contains numerical results of calculations made with various values of physical parameters, several tables serving for calculations, and tables of turbidity coefficients. All tables may serve as basis for calculation by solving various practical and theoretical problems connected with scattering of light in the atmosphere. Numerical methods applied for computation of these tables are explained in text. Subject Headings: 1. Scattering of light 2. Integral equations.—N. A. Zil'ber

511.501.5 535.4

gmu
MT

OVCHINSKIY, B.V.

Kuznetsov, E. S., and Ovchinskiy, B. V. Results of numerical solution of the internal equation of the theory of the scattering of light in the atmosphere. Akad. Nauk SSSR Izv. Akad. Nauk SSSR, no. 4(131), 105 pp. (1949). (Russian)

This paper considers the problem of diffuse reflection and transmission by a plane-parallel atmosphere of optical thickness τ^0 (>0) for the case of isotropic scattering with an albedo $0 < 1 - q \leq 1$ for single scattering. The underlying mathematical problem is that of solving the equation of transfer

$$(1) \quad \frac{dI(r, \mu)}{dr} = I(r, \mu)$$

$$- \frac{1}{2}(1-q) \int_{-1}^{+1} I(r, \mu') d\mu' - \frac{1}{2}(1-q) e^{-\tau^0}$$

together with the boundary conditions (2) $I(0, -\mu) = 0$ and $I(\tau^0, +\mu) = 0$ ($0 < \mu \leq 1$). In (1) $0 < \mu \leq 1$ is the cosine of the angle of incidence of the incident parallel beam of light of unit flux. It is known that this problem is equivalent to that of solving the integral equation

$$(3) \quad \phi_1(r) = \frac{1}{2} e^{-\tau^0} - \frac{1}{2} (1-q) \int_0^{\tau^0} \phi_2(t) E_2(t) dt$$

$$+ \int_0^{\tau^0} \phi_2(t) [E_1(|\mu - \tau|) + q E_2(r) E_2(t)] dt,$$

where $E_n(x)$ denotes the exponential integral of order n .

As a preliminary to the solution of this problem the authors assemble in chapter I various known formulae involving

Source: Mathematical Reviews,

Vol 13 No. 2

ing the exponential integrals. In particular a list of the integrals

$$\int_0^\infty e^{-t} E_1(|z-t|) dt, \int_0^\infty e^{-t} E_1(t) dt$$

is given; the last of these is a special case of the function denoted by $F_1(r, u)$ by H. van de Hulst, [Astrophys. J. 107, 220-246 (1948); these Rev. 10, 151, 855] and S. Chandrasekhar [ibid. 108, 92-111 (1948); these Rev. 10, 543]. A table of the first four exponential integrals for $x=0.01(0.01)0.6$ is also given.

In chapter II an iteration method of solving equation (3) is proposed. For this purpose, a quadrature formula for evaluating integrals of the form

$$(4) \quad I(r) = \int_0^\infty f(t) E_1(|z-t|) dt.$$

is constructed. Thus writing

$$r = kh \quad \text{and} \quad t = mh \quad (k, m = 0, \dots, n)$$

where h is a suitably chosen small fraction, we can express the integral (4) in the form

$$I(kh) = \sum_{m=0}^{n-1} [P_m f(mh) + Q_m h^{-1} \Delta f(mh)],$$

where

$$P_m = E_1[(m-k)h] - E_1[(m-k+1)h], \\ Q_m = E_1[(m-k)h] - E_1[(m-k+1)h] - h E_1[(m-k+1)h], \\ \text{and } \Delta f(mh) = f[(m+1)h] - f(mh). \text{ The quantities } P_m \text{ and } Q_m \text{ satisfy a number of recurrence relations. For convenience of calculation for } r \leq 0.6, \text{ the quantities } P_m, P_{m+1}, Q_m \text{ and } Q_{m+1} \text{ (} m=0, 1, \dots, 60 \text{) and } P_m, P_{m+1}, Q_m \text{ and } Q_{m+1} \text{ (} m=0, 1, \dots, 30 \text{) appropriate for } h=0.01 \text{ and } 0.02, \text{ respectively, are tabulated.}$$

Source: Mathematical Reviews,

Vol. 13

No. 2

213FSK

For the case $q=0$ the iteration runs is performed by correcting an initial approximate solution $\phi_1(r)$ in the manner $\phi_2(r) = \phi_1(r) + A + B\phi_1(r) + C\phi_1^2(r)$ and determining the constants A , B and C by satisfying the integral equation at $r=0$, $r=r^*/2$ and $r=r^*$. Solutions obtained in this manner are tabulated for $r^*=0.2, 0.3, 0.4, 0.5$ and 0.6 for $\cos^{-1} \mu_0 = 30^\circ, 45^\circ, 60^\circ$ and 75° . For the case $q>0$, the solution is expressed in the form $\phi_2(r) = \phi_1(r) + H\omega(r)$, where

$$H = q \frac{1 - 2q \int_0^{r^*} \omega(t) E_1(t) dt}{1 - 2q \int_0^{r^*} \omega(t) E_1(t) dt}$$

and $\omega(r)$ is a solution of the equation

$$\omega(r) = \frac{1}{2} E_1(r) + \frac{1}{2} \int_0^{r^*} \omega(t) E_1(|t-r|) dt.$$

An approximate solution of this last equation (as indicated by a direct solution of the equation of transfer) is $\omega(r) = (r^* - r + 1)/(\phi_1^2 + 1)$; a higher approximation is obtained by the authors by iterating this solution. The coefficient H is tabulated for $r^*=0.2, 0.3, 0.4, 0.5$ and 0.6 for $\cos^{-1} \mu_0 = 30^\circ, 45^\circ, 60^\circ$ and 75° . For these same arguments the functions $\phi_2(r)$ are tabulated for $q=0.1, 0.2, 0.3$ and 0.8 .

Solutions obtained in the manner described above are compared with the solutions obtained by the standard methods of solving the equation of transfer itself. In particular, a detailed comparison is made with the solutions obtained in the second approximation according to the method described by Chandrasekhar [Astrophys. J. 101, 348-355 (1945); 103, 165-192 (1946); these Rev. 6, 244; 7, 489]. [It should be stated that exact solution for the problem considered by these authors is known and that results of greater accuracy are obtained by the method described in S. Chandrasekhar, Radiative Transfer, Oxford, 1950, see particularly §§62 and 63; these Rev. 13, 136.]

S. Chandrasekhar (Williams Bay, Wis.).

SM
JSC

Source: Mathematical Reviews,

Vol 13

No 2

3/3 ESK

OVCHINSKIY, B.V.

Reduction of short series of calculations to an extended
period for stationary random processes. In: *Math. Model.*
92-106 (1995). (Vlad. 1997)

OVCHINSKIY, B.V.

LAW OF DISTRIBUTION OF TWO FORMALLY CORRELATED VARIABLES AND ITS
USE FOR THE OBJECTIVE ANALYSIS OF DATA. TRUDY VUZOV, 1975, NO. 1,
P. 5.

GROSBERG, Yu.I.; OVCHINSKIY, B.V.

"Fundamentals of computer mathematics" by B.P.Demidovich, I.A.Maron.
Usp. mat. nauk 18 no.2:253-257 Mr-Apr '63. (MIRA 16:8)
(Mathematics) (Programming (Electronic computers))
(Demidovich, B.P.) (Maron, I.A.)

SECRET
CONFIDENTIAL
TOP SECRET

CONFIDENTIAL
TOP SECRET

OVCHINSKIY, K., insh.

Brigade accounting in the Turkmen Petroleum Construction.
Stroitel' no.5:14 My '59. (MIRA 12:8)
(Turkmenistan--Construction industry--Accounting)

OVCHINSKIY, K.L.

Obtaining insulating air-entrained silicate using barchan sand.
Stroil. mat. 9 no.2:43-24, P '63. (MI: A 16:2)

1. Nachal'nik tekhnicheskogo otdela Ministerstva stroitel'stva i
stroitel'nykh materialov Turkmenской SSR.
(Sand) (Insulating materials)

OVCHININSKIY, Nikolay Vladimirovich; TURKIN, Aleksandr Vladimirovich;
KOROBov Lev Nikolayevich; LYUDOGOVSKIY, G.I. kand. tekhn.
nauk, otv. red.; PEVZNER, G.Ye., red. izd-va; SIMKINA, G., tekhn.
red.

[Expansion of ferrous metallurgy in the central regions of the
U.S.S.R.; importance for the national economy of the industrial
utilization of the Kursk Magnetic Anomaly] Voprosy razvitiia chernoi
metallurgii v tsentral'nykh raionakh SSSR; narodnokhoziaistvennoe
znachenie promyshlennogo osvoeniia Kurskoi magnitnoi anomalii. Mo-
skva, Izd-vo Akad. nauk SSSR, 1961. 137 p. (MIRA 14:9)
(Kursk Magnetic Anomaly—Iron mines and mining)
(Metallurgical plants)

ABALYAN, N.; OVCHIYAN, V.

Depth of underground pipe laying under the conditions of the
Armenian S.S.R. Prom.Arm. 5 no.8:12-21 Ag '66. 'MIRA 16:'

1. Armniikhimproyekt.
(Armenia.--Pipelines)

ABALYAN, N.; ASATURYAN, V.; BALAYAN, A.; OVCHIYAN, V.

A map of corrosiveness and its use in planning protective
measures for underground metal constructions. Rom.Arm.
4 no.10:56-59 0 '61. (MIRA 14:11)

1. ~~Armiikhinproyekt~~.
(Corrosion and anti-corrosives)

PROVINLEN, I.V.; VERLEN, I.V.

Relationship between the tear resistance of water proof films
and their relative elongation caused by heat. 12. 1. 1965.
Vys. Ser. tekhn. nauk 18 no.2:64-66. 1965.

1. Armyanskiy nauchno-issledovatel'skiy institut...
materialov i snor zheniy. Submitted Jan. 5, 1965.

OVCHINEN, S.G.

Resistance to microorganisms of some film polymer waterproof
materials. Izv. AN Arm. SSR. Ser. tekhn. nauk 17 no.1:53-56
(MIRA 17:3)

1. Armyanskiy Nauchno-issledovatel'skiy institut stritel'-
nykh materialov i sooruzheniy.

OVCIN, D.; DRAGANIC, I.

Radiolysis of aqueous solutions of oxalic acid. Pt. 3; abstract.
Glas Ben dr 27 no. 9/10:541-542 '64

1. The Boris Kidric Institute of Nuclear Sciences, Department
of Radiation Chemistry, Belgrade-Vinca.

OVCIN, D.; MICIC, O.; DRAGANIC, I.

Radiolysis of aqueous solutions of oxalic acid. Pt. 2; abstract.
Glas Hem dr 27 no. 9/10: 539-540 '64

1. The Boris Kidric Institute of Nuclear Sciences, Department
of Radiation Chemistry, Belgrade-Vinca.

ST. J. R. V. 1944

1944

1944

OVDIENKO, P. V.

OVDIENKO, P. V. - "Autonomous Rayon of Inner Mongolia (Economic Geography Features)." Sub 23 May 52, Moscow Order of Lenin State University named after M. V. Lomonosov. (Dissertation for the Degree of Candidate in Geographical Sciences).

SO: Vechernaya Moskva January-December 1952

ОВУДЕНКО, Р. В.

Defended as Candidate of Sciences in the Geography Faculty of the Novosibirsk State University on 2 June 1971.

Dissertation: "The Inner Mongolian Autonomous Region (Inner Mongolia) Characterization."

NO: Vestnik Novosibirskogo Universiteta, Seriya Fiziko-Matematicheskie Nauki, Yekaterinburgskiy Vostok, 1971, No. 1, 151-157; Izvestiya, 1972, 15 April 72, for off. use only.

OVDIYENKO, D.

"Organisation of haulage and expedition operations" by
IA. A. Liv'iant. Reviewed by D. Uvdienko. Avt. transp. 36
no.10:61-62 U '58. (MIRA 13:1)
(Transportation, Automotive)
(Liv'iant, IA. A.)

1 27804-66 ENA(h)/ENT(1)

ACC NR: AP6012702

SOURCE CODE: UR/0119/66/000/004/0013/0014

AUTHOR: Ordynko, G. I. (Engineer)

ORG: none

TITLE: Relay-type timer ²⁵

SOURCE: Pribozstroeniye, no. 4, 1966, 13-14

TOPIC TAGS: timer, time relay / ROV-1 timer ²⁴ ¹⁰

ABSTRACT: A ROV-1 Soviet-made electric timer is described. It is intended for turning on or off electric circuits after a preset time (1 to 25 min) elapses; power supply, 220 v, 50 cps. It can operate in stationary installations, with no shock or vibration, at 0-35°C, humidity not over 70%. Its error is $\pm 3-6$ sec for a supply-frequency variation of ± 0.1 or 0.2 cps. The timer is based on a RSI-1 pulse counter and includes a transformer, a selenium rectifier, a step selector switch, a time setting device, a synchronous motor, 3 intermediate relays, and an output relay. Its electric circuit is described, and general view is shown. Orig. art. has: 2 figures.

SUB CODE: 09 / SUBM DATE: none

Card 1/1 *ce*

UDC: 621.318.563.5

YASTREMSKIY, Ivan Stanislavovich [IAntrema'nyi, I.S.], kand.ekon.nauk;
OVDIYENKO, L.O., kand.ekon.nauk, glavnyy red.

[Decisive role of the heavy industry in the development of the
national economy of the U.S.S.R.] Vyrishal'na rol' vazhkoï
promyslovosti v rozvytku narodnoho hospodarstva SRSR, Kyiv,
1959. 47 p. (Tovarystvo dlia poshyrennia politychnykh i
naukovykh znan' URSR, Ser.2, no.4) (MIRA 12:8)
(Russia--Economic policy)

STANKEVI , . . [Stankevych, K.I.], kand. med. nauk; OVDIYENKO, T.L.
[Ovdiyenko, T.L.]

Hygienic properties of some synthetic fabrics for clothing and
footwear. Lek. prom. no.3:26-29 JI-S '65. (MIRA 18:9)

OVECHENKO, N.G., inzh.; LEVASHEVA, E.M., inzh.; PAVLOV, S.A., doktor tekhn.
nauk, prof.

V/M-type emulsions for bonding fibrous systems. Report No.1.
Izv.vys.ucheb.sav.; tekhn.leg.pro m. no.6:64-69 '60.

(MIRA 14:1)

1. Moskovskiy tekhnologicheskiy institut legkoy promyshlennosti.
Rekomendovana kafedroy tekhnologii iskusstvennoy kozhi.
(Leather substitutes) (Emulsions)

OVECHENKO, N.G., inzh.; PAVLOV, S.A., doktor tekhn.nauk.prof.

Effect of the nature of the binding agents on the physical and mechanical properties of nonwoven fibrous film systems. Report no.1. Izv.vys.ucheb.zav.; tekhn.prom. no.1:13-21 '62.
(MIRA 15:2)

1. Moskovskiy tekhnologicheskii institut legkoy promyshlennosti.
Rekomendovana kafedroy tekhnologii iskusstvennov kozhi i plenochnykh materialov.

(Binding materials)(Textile fibers, Synthetic)

OVECHENKO, N.G., inzh.; PAVLOV, S.A., doktor tekhn.nauk, prof.

Effect of the nature of the binding agents on the physical
and mechanical properties of nonwoven fibrous film systems.

Report No.2. Izv.vys.ucheb.zav.;tekh.log.prom. no.2:53-54
(KKhA 15 6)

1. Moskovskiy tekhnologicheskiy institut legkoy promyshlennosti.
Rekomendovana kafedroy tekhnologii iskusstvennoy kozhi i
plenochnykh materialov.

(Nonwoven fabrics) (Binding materials)

OVECHENKO, N.G., kand. tekhn. nauk; DMITRUSHINA, Z.T., inzh.; BARKOV, L.V.,
inzh.; PAVLOV, S.A., doktor tekhn. nauk, prof.

Effect of the fiber length and amount of bonding materials on
the physicochemical properties of nonwoven fibrous film
systems. Tekst. prom. 23 no.9:30-33 S '63. (MIKA 16:10)

1. Sotrudniki Moskovskogo tekhnologicheskogo instituta legkoy
promyshlennosti (MTILF).

(Nonwoven fabrics)

S/061/62/000/007/030/033
B166/3101

AUTHORS: Ovechenko, N. G., Nal', I., Pavlov, S. A.

TITLE: Artificial fatiguing of adhesion points between polymers

PERIODICAL: Referativnyi zhurnal. Khimiya, no. 7, 1961, 643-644.
abstract 71307 (Izv. vyssh. uchebn. zavedeniy. Tekhnol.
legk. prom-sti, no. 4, 1961, 27-33)

TEXT: Joints obtained by folding layers of polyamide Ar-60/40 Ar-60/40 and nairit -I (NT) (I) were subjected to static fatiguing on a T-1-1 (PNE-1) apparatus by being stretched 25-150% and held in this position, and also to dynamic fatiguing on three apparatuses - a mechanical oscillator TMK-1 (CMK-1), a machine for multiple stretching and compressing MPC-2 (MRS-2) and a machine of original design with a fatiguing frequency of 3 cycles per minute and producing a deformation of 20%. After fatiguing, the joints were split on a noninertia tensile-testing machine of original design, with which the momentary variation in splitting effort could be followed by means of strain gauges. In order to even out
Card 1/2

BORISOVA, K.V., inzh.; OVECHENKO, N.O., inzh.; SMIRNOVA, T.V., kand.
tekhn.nauk; ~~LEVASHEVA, B.M.~~, studentka; NAD', I., student

Plasticizers from chemical by-products for polyvinyl chloride.
Izv.vys.ucheb.zav.; tekhn.leg.prom. no.1:57-61 '59.
(MIRA 12:6)

1. Moskovskiy tekhnologicheskii institut legkoy promyshlennosti.
Rekomendovana kafedroy tekhnologii iskusstvennoy kozhi.
(Plastics) (Plasticizers)

OVDIYENKO, Nikolay Petrovich, gor. inzh.; SLAVNITSKAYA, N.N.,
red.; AZOVKID, N.N., tekhn. red.

[Circular timbering in mines of the "Oktiabr'ugol'"
Mining Trust] Kol'tsevoe dereviannoe kreplenie pomykh
vyrabotok na shakhtakh tresta "Oktiabr'ugol'." Niazan'.
Niazanskoe knizhnoe izd-vo, 1963. 47 p.
(MIA 17:1)

OVCHENKO, N.G., kand. tekhn. nauk; KRAVKOVA, I.A., mladshiy nauchnyy
sotrudnik; PAVLOV, S.A., doktor tekhn. nauk, prof.

Microstructure of nonwoven fibrous film systems and the effect
exerted on it by the technological procedures. Tekst. prom.
23 no.9:27-30 S '67. (MIRA 16:10)

1. Sotrudniki Moskovskogo tekhnologicheskogo instituta legkoy
promyshlennosti (MTILP).
(Nonwoven fabrics)

YUSUPOV, A.A.; NEVSKAYA, A.I.; OVDIYENKO, N.I.

Disorders in the functional state of dog liver following SQC
lesion. Biul. eksp. biol. i med. 57 no. 2:29-33 F '64.
(MIRA 17:9)

1. Predstavlena deystvitel'nym chlenom AMN SSSR A.V. Lebedinskim.

OVECHKIN, A.

USSR/Electronics - Radiofication

Aug 52

"Radio in Every Kolkhoz Home," A.Ovechkin,
Secy, Velikiye Luki Rayon Committee VKP(b)

"Radio" No 8, p 11

Describes the progress of radiofication work in the "imeni Andreyev," "Smychka," and other kolkhozes. States that, in a short period, 23 kolkhozes, 2 MTS, and 2 sovkhoses of this rayon have been radiofied; 9 kolkhozes, one MTS, and one sovkhos will be radiofied in 1952.

226718

OVERER N, A. M.

Raschet kamennykh, armirovaniykh i kombinir vanykh konstruktsi
usiliyam Calculation for stone, reinforced concrete and
the effect of strain on the strength of concrete and
(50-213.1)

THEAS. 4

OVECHKIN, A.M., dotsent, kandidat tekhnicheskikh nauk.

Problem of determining the epure of moments for contrinuous reinf-
forced concrete girders under conditions of least metal consumption.
Trudy MIIT no.84/85:29-44 '56. (MLRA 3:11,
(Girders) (Reinforced concrete)

Name: OVECHIN, Aleksandr Mikhaylovich

Dissertation: Investigation of the maximum balance
of reinforced-concrete arches and
domes

Degree: Doc Tech Sci

Affiliation: Not indicated

Defense Date, Place: 4 Apr 56, Council of Moscow Order of
Lenin and Order of Labor Red Banner
Inst of Engineers of Railroad Trans-
port imeni Stalin

Certification Date; 1 Jul 56

Source: RHWG 5/57

14(10)

PHASE I BOOK EXPLOITATION

SOV/1214

Mitropol'skiy, Nikolay Mikhaylovich (Deceased), Ovechkin, Aleksandr Mikhaylovich, Aleshinskiy, Yuriy Nikolayevich, and Bogdanovich, Anton Fedorovich

Stroitel'nyye konstruktsii (Structures) Moscow, Transzheldorizdat, 1958. 576 p. 12,000 copies printed.

Ed. (Title page): Ovechkin, A.M., Doctor of Technical Sciences; Eds. (Inside book): Fishchukov, M.A., Candidate of Technical Sciences, and Karamyshev, I.A., Engineer; Tech. Ed.: Khitrov, P.A.

PURPOSE: This textbook is approved by the Ministry of Higher Education of the USSR for students of engineering institutes of the railroad system.

COVERAGE: The book contains fundamentals for the design and analysis of structures made of steel, wood, reinforced concrete, stone, concrete and reinforced stone. The syllabus and outline of the textbook were compiled by the late Professor N.M.Mitropol'skiy and after his death the editing was completed by A.M. Ovechkin, Doctor of Technical Sciences. Each part contains a description

Card 1/16

Structures

SOV/1914

of: 1) the properties of materials 2) the methods of analysis of individual elements of a structure 3) methods of joining structural elements 4) examples of the analysis and design of structures. In preparing this book for publication valuable comments made by the department of "Bridges and Structures" and "Structural Mechanics" of the Tbilisi Institute of Engineers of Railroad Transport were considered and also those made by K.S. Zavriyev, Academician of the Georgian SSR, active member of the Academy of Construction and Architecture, USSR; by V.I. Mureshov, active member of the Academy of Construction and Architecture, USSR; by Professor A.I. Orlovshko and Docent V.N. Baykov. There are 163 references, 135 of which are Soviet, 9 English, 7 French, 7 German and 4 others.

TABLE OF CONTENTS:

From the authors

3

Card 2/16

Structures

SOV/1214

PART I. GENERAL CONDITIONS

- Ch. 1. Fundamentals of Structural Design
1. Requirements for structures 4
 2. Comparison of various kinds of structures, and their fields of application 5
 3. Basic requirements of structure analysis, according to the design limit stress conditions 7
 4. Standard and design loads. Design 8
 5. Standard and design strength 11
 6. Effectiveness factor 13
- Ch. 2. Analysis of Structures for Limit Design
1. Strength analysis 13
 2. Stability analysis 13
 3. Deformation analysis 16

PART II. STEEL STRUCTURES

- Ch. 3. General Information on Metal Structures
1. Brief historical survey of the development of metal structures 18
- Card 3/15

Structures

SOV/1214

2. General characteristics of steel structures	19
Ch. 4. Materials for Steel Structures	
1. General information. Basic characteristics of steel as a material for structural elements	21
2. Trade marks of structural steels and fields of application	23
3. Grading of structural rolled-steel	25
Ch. 5. Analysis of the Elements of Steel Structures	
1. Basic conditions of the analysis	28
2. Members under axial, tensile and compression loads	33
3. Bending of members	35
4. Combined action of the longitudinal force and the bending moment	42
5. Analysis for endurance -- fatigue strength	50
6. Local stability of steel plates	53

Card 4/16

Structures

SOV/1214

Ch. 6. Joining Elements of Steel Structures	
1. Welded joints	60
2. Riveted joints	75
3. Bolted joints	83
4. Cemented joints	85
Ch. 7. Columns on Struts Under Axial Compression Loads	
1. General characteristics of columns. Types of columns and their cross sections	85
2. Columns with latticed struts	88
3. Analysis and design of the solid strut columns	94
4. Base and capital of columns	97
Ch. 8. Composite Beams	
1. General information. Variety of beams, their comparative characteristics, fields of application, design of the cross section of a beam	103
2. Selection of a beam's section. Design and analysis of joint flanges with webs	107

Card 5/16

Structures

SOV/1214

Ch. 12. Basic Characteristics and Mechanical Properties of Wood.

Measures for Protection from Rotting and Fire

1. Factors influencing mechanical strength 154
2. Strength of wood depending on variety of tree 154
3. Strength depending on volumetric weight and percentage of light wood content 155
4. Effect of humidity on the strength of wood 156
5. Effect of growth defects (knots, curly grain) and cracks on strength 157
6. Effect of high and low temperature on strength 159
7. Duration of wood 159
8. Effect of intermittent loads 161
9. Effect of dimensions of elements and cross sectional shape 162
10. Standard and calculated resistance of wood and coefficients of strain conditions 163
11. Grading 164
12. Rot protection measures 166
13. Fire protection measures 167
14. Protection from wood-insects 168

Card 7/16

Structures

SOV/1214

Ch. 13. Resistance of Wood to Mechanical Stresses and Calculation of Whole Members	
1. Tension	158
2. Axial compression and warping along the grain	170
3. Compression and warping across the grain	173
4. Shearing	175
5. Bending	177
6. Excentric tension	180
7. Excentric compression	181
Ch. 14. Joints for Elements	
1. Characteristics of joints	186
2. Face notches	187
3. Dowel joints	190
4. Metal tension-rods and clamps	210
5. Support assemblies for frontal abutments	214
6. Wooden prismatic keys	216
7. Metal keys	219
8. Glued joints	221
9. Glued steel washers	224

Card 8/16

Structures

SOV/1214

- Ch. 15. Compressed Composite Members
1. Axially compressed composite members 225
 2. Excentrically compressed composite members 232
- Ch. 16. Composite and Glued Beams
1. Beams from blocks and ~~girders~~ joined by laminar dowels and crosspieces 233
 2. Nailed beams with webs 237
 3. Glued beams 242
- Ch. 17. Trusses, Arches, and Frames
1. Choice of diagrams for structural trusses and determining geometric dimensions 244
 2. Determination of stresses in frame members 250
 3. General instructions for the design of trusses made of grooved girders and beams 254
 4. Triangular trusses 258
 5. Trapezoidal trusses made of girders and blocks 262
 6. Professor A.I. Otreshko's polygonal trusses joined by dowels and grooves 263
 7. V.S. Derevyagin's polygonal trusses 266

Card 9/16

Structures

SOV/1214

- | | |
|---|-----|
| 8. Metal trusses with two sloping surfaces, and Svetsitskiy's polygonal square beam trusses | 267 |
| 9. V.S. Skvortsov's pentagonal trusses | 270 |
| 10. Arches and trusses with an upper girder built with V.S. Deravyagin's beams | 272 |
| 11. Three-hinged arches made of girders | 273 |
| 12. Trussed girders, trusses, and beams | 274 |
| 13. Segmental nailed trusses | 276 |
| 14. Three-hinged arches made of segmental nailed trusses | 279 |
| 15. General instructions on the design of glued arches and trusses | 281 |
| 16. Glued arches with rectilinear and curvilinear bars | 282 |
| 17. Segmental glued trusses made of metal and timber | 284 |
| 18. Segmental glued counterbraced trusses with a semistrut grid | 287 |
| 19. Glued trusses made of metal and wood having a rectilinear upper girder | 291 |
| 20. Triangular glued trusses | 295 |
| 21. Frame-like glued structures | 296 |
| 22. Curved arches | 298 |
| 23. Securing space rigidity of plane wooden structures | 300 |

Card 10/16

Structures

SOV/1214

Ch. 18. Diagonally Ribbed Segmented Vaulted Roof

1. General information 303
2. Design of vaults 306
3. Analysis of vaults 307

Appendixes to Section III

308

PART IV. REINFORCED CONCRETE STRUCTURES

Brief historical outline of the origin and development of reinforced concrete structures 310

Ch. 19. General Information on Reinforced Concrete Structures

1. Characteristics of reinforced concrete structures 312
2. Characteristics of concrete 313
3. Characteristics of steel reinforcement 318

Ch. 20. Fundamentals of Reinforced Concrete Analysis

1. Stages of stress-strain in reinforced concrete subjected to bending 322

Card 11/16

Structures

SOV/1214

2. General formula of normal stresses according to the classical theory	324
3. Analysis of the axial compression of a column and of elements under bending stresses according to the classical theory	327
4. Deficiencies of the classical theory of analysis	328
5. Concept of the analysis of elements of a reinforced concrete structure according to rupture stresses	329
Ch. 21. Analysis of Reinforced Concrete Structures for Calculated Ultimate Conditions	332
1. Basic conditions of the analysis	332
2. Resistance coefficients, calculated resistances and coefficients of the conditions of work of the structure	333
Ch. 22. Strength and Stability Analysis	335
1. Analysis of axially compressed elements	338
2. Analysis of elements under axial tensile stress	338
3. Analysis of elements under bending according to normal sections	338
4. Analysis of elements under bending according to oblique sections	347
Card 12/16	

Structures

SOV/1214

Ch. 26. Prestressed Reinforced Concrete Structures

- | | |
|--|-----|
| 1. General conditions | 455 |
| 2. Reinforcements for prestressed reinforced concrete structures and their anchorage | 457 |
| 3. Prestressed reinforced concrete structures | 461 |
| 4. Analysis of prestressed reinforced concrete structures | 476 |

Ch. 27. Precast Reinforced Concrete Structures

- | | |
|---|-----|
| 1. Division of the structure into precast elements | 500 |
| 2. Elements of precast structures | 502 |
| 3. Precast roof structures, frames, and trusses | 519 |
| 4. Analysis of precast reinforced concrete structures | 527 |
| 5. Deformation seams | 527 |

PART V. STONE, CONCRETE, AND REINFORCED STONE STRUCTURES

Ch. 28. Stone Structures

- | | |
|--|-----|
| 1. Brief historical outline of the origin and development of stone and reinforced stone structures and their fields of application | 530 |
| 2. Materials for stone structures | 532 |
| 3. Strength of masonry | 535 |
| 4. Elastic and plastic qualities of masonry | 539 |

Card 14/16

Structures

SOV/1214

Appendixes to Chapters IV and V

566

Bibliography

568

AVAILABLE: Library of Congress

IS/hcr
3-23-59

Card 16/16

OVECHKIN, A.M., doktor tekhn.nauk

Equilibrium equation for reinforced concrete domes in the stage of
the limiting state. Nauch.dokl.vys.shkoly; stroi. no.1:35-46 ' 58.
(MIRA 12:1)

1. Rekomendovana kafedroy stroitel'nykh konstruktsey Moskovskogo
instituta inzhenerov zheleznodorozhnogo transporta imeni I.V. Stalina.
(Domes)

OVECHKIN, A.M., doktor tekhn.nauk

Limiting equilibrium of reinforced concrete rotating shells.
Nauch.dokl.vys.shkoly; stroi. no.2:19-28 '58. (MIRA 12:1)
(Elastic plates and shells)

7/14

AUTHOR: Ovechkin, A.M., Doctor of Technical Sciences

TITLE: Investigation of Load-Carrying Capacity of Reinforced Concrete Arches and Cupolas With Special Reference to Sloping Sections (Issledovaniye nesushchey sposobnosti zhelezobetonnykh ark i kupolov po naklonnym semyaniyam)

PERIODICAL: Beton i Zhelezobeton, 1956, No. 5, USSR, Pp 187-190

ABSTRACT: The author carried out tests on reinforced concrete arches of collapse along sloping sections and these showed that the formation of cracks on the slopes of the arches began at the middle of their height (see Figure 1). With the increase of loading the cracks lengthened in the inclined directions both ways and entered the zones of the top and bottom reinforcements which were compressed (see Figure 2). Further increase in the lengths of the cracks stopped regardless of some further increase in loading but the widening continued to the point of sudden collapse of the arch. This was accompanied by the deformation of the longitudinal reinforcement. Figure 3 illustrates collapse of the arch on the incline section. The method of calculation of collapse of reinforced concrete arches in inclined sections due to transverse

Card 1/2

97-54-5-7/14

Investigation of the Load Carrying Capacity of Reinforced Concrete Arches and Cupolas with Special Reference to Slipping Sections.

stresses was carried out according to the work of Professor A.A. Gvozdev and Candidate of Technical Science M.S. Borishanskiy. Formulae and explanation of the process of calculation are given. Figure 4 illustrates a graphical interpretation of the calculation of the arch along an inclined section and Figure 5 illustrates disintegration in the inclined internal sphere of the cupola. Figure 6 illustrates partial collapse of the cupola and Figure 7 the disintegration of the shell construction of the cupola along the inclined section. Formulae worked out by Gvozdev and Borishanskiy for defining transverse stresses of compressed zones of concrete beams were used for the calculation - the adaptation of these formulae is given and graphically illustrated in Figure 8. Figure 9 illustrates the collapse along the inclined section of a heavy semi-spherical cupola and Figure 10 illustrates the collapse in the inclined section of a cupola constructed from shell concrete (internal view). There are 11 Figures.

1. Structures--Mechanical properties
--Applications

Card 2/2

OVECHKIN, A.M., doktor tekhn. nauk, prof.; BUDARINA, E.M., red. izd-va;
RUDAKOVA, N.I., tekhn. red.

[Design of axially symmetric reinforced concrete elements (shells)]
Raschet zhelezobetonnykh osesimmetrichnykh konstruksii (obolochek).
Moskva, Gos. izd-vo lit-ry po stroit., arkhitekt. i stroit. materialam.
1961. 258 p. (MIK 14:10)
(Roofs, Shell) (Reinforced concrete construction)

MASH, D.I.; OVECHKIN, A.I.

Ferromagnetic resonance in some ferrates in the centimeter and millimeter wave bands. Zhur. tekhn. fiz. 1972, no. 2: 111-112, 3 figs.

(MIRA 1972)

1. Fizicheskiy institut imeni P.N. Lebedeva AN SSSR, Moskva.
(Ferromagnetic resonance)
(Microwaves)

AUTHORS: Guseva, L. N. and Ovechkin, B. I. (Moscow). 24-6-5/24

TITLE: A study of chromium-silicon alloys rich in chromium.
(Issledovaniye splavov khroma s kremniyem, bogatykh kromom).

PERIODICAL: "Izvestiya Akademii Nauk, Otdeleniye Tekhnicheskikh Nauk"
(Bulletin of the Ac.Sc., Technical Sciences Section),
1957, No.6, pp.27-31 (U.S.S.R.)

ABSTRACT: Studies of Cr-Si alloys have been reported in refs.1 to 5. In the present work the region of phase diagram rich in chromium (up to 35% Si) was investigated. 99.9% pure silicon and electrolytic refined chromium were used. The solubility of Si in Cr was determined by smelting the alloy in an argon atmosphere in an arc furnace. Before smelting, the specimens were pressed and sintered at a temperature of 900 C in a vacuum. For alloys containing more than 8% of Si, the smelting was carried out in a high frequency furnace in corundum crucibles under barium chloride. Table 1 shows the chemical and phase composition of the alloys investigated (First column: number of alloy. Second column: wt. % Si, based on the charge. Third column: wt.% Si, based on chemical analysis. Fourth column: phase composition). Homogenising treatment was carried out in a vacuum, in quartz ampules, at 1200 C for 120 hours, after which the alloys were

Card 1/3

24-6-5/24

A study of chromium-silicon alloys rich in chromium. (Cont.)
 of the x-phase, one observes CrSi lines (Fig. 7). Results
 of X-ray analysis are supported by micro-structure studies,
 Fig. 8. Primary evolution of Cr₂Si and secondary evolution
 of the x-phase are seen in the 17% Si alloy (Fig. 8a).
 As the silicon content increases, the amount of this phase
 increases. The alloy containing 20% Si, which corresponds
 to the stoichiometric relation for Cr₂Si, still contains a
 considerable amount of Cr₂Si, Fig. 8b. At the same time,
 the character of the structure remains unchanged. The
 24.5% Si alloy has a microstructure near to the single-phase
 type, Fig. 8c. Further increase in Si content leads to
 a primary evolution of the x-phase and the eutectic
 composition x + CrSi.
 There are 8 figures and 4 tables and 5 references, one of
 which is Slavic.

Card 3/3

SUBMITTED: August 6, 1950.

AVAILABLE:

CVECHKIN, H.

21
Thermoelectric properties of chromium silicide. L. N. 4E2c
Ongers and R. I. Ovschinnik. *Doklady Akad. Nauk S.S.S.R.* 112, 681-2 (1957). The Cr-Si alloys were prepd. from electrolytic Cr and 99.9% pure Si by fusion in quartz crucibles under BaCl₂ flux in an induction furnace. The phase compn. of the alloys was studied by x-ray and microphotography after annealing for 4 days at 1100°. The elec. const. and the thermal e.m.f. of the alloys were detd., and the compds. Cr₃Si, Cr₅Si₃, and CrSi were found to have characteristic metallic cond.; CrSi₃ is a semiconductor with an activation energy of 1.3 e.v.

W. M. Sternberg

for JR
conf

SOV/180-59-2-14/34

AUTHORS: Guseva, L.N., and Ovechkin, B.I. (Moscow)

TITLE: Atomic Scattering of X-Rays on Solid Solutions of Copper with Nickel (Atomnoye rasseyaniye rentgenovykh luchey na tverdykh rastvorakh medi s nikelem)

PERIODICAL: Izvestiya akademii nauk SSSR, Otdeleniye tekhnicheskikh nauk, Metallurgiya i toplivo, 1959, Nr 2, pp 82-85 (USSR)

ABSTRACT: The authors have measured the intensity of the diffraction spectra of copper-nickel alloys to study the deviation of the atomic scattering function from additivity. Specimens were prepared by melting the electrolytic metals, homogenizing at 900 °C for eight days in vacuum and filing to pass through a 300-mesh sieve. Before screening the filings were heat treated to remove stresses. The investigation was effected with copper filtered radiation, with photometry of the diagrams on a type MF-4 microphotometer. To allow for the influence of the thermal factor on reflection intensity the alloy characteristic temperature was determined to an accuracy of $\pm 6\%$ by obtaining diffraction spectra at two temperatures (22 and -135 °C) in a RKD camera with a special cover. Condensation

Card 1/3

SOV/180-59-2-14/34

Atomic Scattering of X-Rays on Solid Solutions of Copper with Nickel
associated with static displacement of atoms in the
crystal lattice.
There are 1 figure, 2 tables and 6 references, 5 of
which are Soviet and 1 English.

SUBMITTED: October 6, 1958

Card 3/3

L 04195-67 ENT(m)/ENP(t)ETL SAIR, 11(2) 11/11/71
ACC NR: AP6028587

SOURCE CODE: UR/0129/66/000/008/0031/0034

AUTHOR: Ovchkin, B. I.

ORG: none

TITLE: Effect of straightening on the texture and mechanical properties of MA2-1 alloy sheet 4

SOURCE: Metallovedeniye i termicheskaya obrabotka metallov, no. 8, 1966, 31-34

TOPIC TAGS: magnesium alloy, yield strength, ductility, metallographic examination, x ray diffraction analysis, twinning

ABSTRACT: Roller leveling of hot-rolled ²⁷magnesium alloy sheet changed the yield strength slightly and decreased the ductility. Pole figures of (0002) planes were used to study twinning after hot rolling and subsequent leveling in both transverse and longitudinal directions. After leveling¹⁴ in the rolling direction, intensive twinning occurred on the (10 $\bar{1}$ 2) planes, while in the transverse direction a complex twinned structure resulted with little twinning on the (10 $\bar{1}$ 2) planes. In the longitudinal direction, leveling caused the 0.2% yield strength to decrease from 29.6 to 15.1 kg/mm² with little change occurring in the transverse direction. In both cases however, the relative elongation decreased from 10 to 3%. The orientations of the basal planes changed after leveling. After hot rolling, the pole figures exhibited an intense cen-

UDC: 621.982:669.71'72:620.186.4

Card 1/2

NAKHUTIN, I.Ye.; OVECHKIN, D.V.; OCHKIN, D.V.; POLYAKOV, A.S.; KHODULEVA,
Z.K.

Production of the radioactive isotope Kr^{85} and investigation of
its γ -radiation. Zhur. eksp. i teor. fiz. 39 no.4:991-992 0
'60. (MIRA 13:11)
(Krypton--Isotopes) (Gamma rays)

USSR/Physics - Luminescence

May 52

"New Type of Luminescence in Fused Quartz and Plexiglass," G. V. Ovechkin, Leningrad State U

"Zhur Eksper i Teoret Fiz" Vol XXII, No 5, pp 610-616

Proves on samples of plexiglass and fused quartz that a new type of luminescence is produced by irradiation of sample with ultraviolet radiation under simultaneous action of some short-lived de-formation wave. Samples are not colored and have a relatively long afterglow. Fused quartz acquires the property of thermoluminescence. The spectrum

219795

of this thermoluminescence is shifted toward long-wave side as compared to the spectrum of afterglow. Indebted to Prof V. M. Chulanovskiy, F. D. Klement, S. B. Frish and V. V. Antonov-Romanovskiy. Received 21 Jul 51.

OVECHKIN, G.V.

219795

1. OVECHKIN, G. V.
2. USSR 600
4. Quartz
7. New type of luminescence in fused quartz and plexiglas, Nauch. biul. Len. un, No. 30, 1952.
9. Monthly List of Russian Accessions, Library of Congress, April 1953, Uncl.

PRINTED TO ORDER
20(7) PHASE I BOOK EXPLOITATION SOV/1965
L'vov. Universitet

Materialy I Vsesoyuznogo s'ezhdeniya po spektroskopii. 1. 1.
Molekulyarnaya spektroskopiya [Papers of the 10th All-Union
Conference on Spectroscopy. Vol. 1: Molecular Spectroscopy,
[L'vov] izd-vo L'vovskogo univ-ta, 1957. 499 p. 4,000 copies
printed. (Series: Itel' fizicheskoy shizmy, vyp. 1/8/1)

Additional Sponsoring Agency: Akademiya nauk SSSR. Komissiya po
spektroskopii. Ed.: Jazov, S.L.; Tech. Ed.: Saranyuk, Y.V.;
Editorial Board: Lavsterg, O.S., Academician (Resp. Ed., Deceased),
Neporent, B.S., Doctor of Physical and Mathematical Sciences,
Pavlinitskiy, I.L., Doctor of Physical and Mathematical Sciences,
Pavlovskiy, V.A., Doctor of Physical and Mathematical Sciences,
Kornikova, V.G., Candidate of Technical Sciences, Rayevskiy, S.M.,
Candidate of Physical and Mathematical Sciences, Klimovskiy, L.K.,
Candidate of Physical and Mathematical Sciences, Milyanchuk, V.S.,
A. Ye., Candidate of Physical and Mathematical Sciences.

Card 1/30

Babushkin, A.A., B.A. Gropier, and P. Ya. Glasunov.
Spectrophotometric Equipment for the Continuous
Absorption Analysis and Registration of Gas
Concentration

360

Arkhangel'skaya, V.A., B.I. Vaynberg, and T.K. Razumova
Simple Method of Determining the Passing of Some
Optical Materials in Schumann's Spectrum Region

363

Grudinkina, N.P. Spectrophotometric Determination of
Water Purity

364

Oreshkin, G.V. Condensed Discharge Through a Capillary
as a Powerful Source of Continuous Spectrum in
Spectral Studies

365

Yakovlev, S. Ya. A Wedge-shaped Black Body as a
Source of Radiation for Spectrophotometric
Measurements

368

Card 21/30

OVECHKIN, G.V.

Methods and techniques for producing bright continuous spectra.
Uch.zap.BGU no. 32:219-230 ' 57. (MIRA 11:12)
(Spectrum analysis)

...VANDERBILT, ...
...
...of ...
...
...state ...
...
...
...

OVECHKIN, G.V.; KRIVOSHEYEV, N.P.

Using the spectral method in determining the degree of penicillin inactivation. Izv.-fiz.khim. vol.1:10-11. Jan. 1967. (MIR, 1967)

1. Belorusskiy gosudarstvennyy universitet im. V.I. Lenina, M. Minsk.
(Penicillin--Testing)

OVECHKIN, G.V.; PALTARAK, Ye.N.; GRINEVICH, V.A.

Analysis of bronze Sn:Zn:Pb-5:5:5 with the ST-7 steelometer.
Inzh.-fiz.zhur. no.5:92-94 My '58. (MIRA 12:1)

1. Belorusskiy gosudarstvennyy universitet imeni V.I. Lenina, g.
Minsk.

(Bronze--Analysis)

67214

30V/18-54

24.3400

Translation from Referativnyy Zhurnal. Fizika, 1969, Nr 1, p 26 (USSR)

AUTHOR Ovechkin, G.V.

TITLE: Radiation During a Condensed Discharge Through a Capillary

PERIODICAL Uch zap Belorussk un-ta, 1968, Nr 4, pp 100-105

ABSTRACT The author studied radiation during a condensed discharge through a capillary under various conditions. It is shown that the brightness of the continuous spectrum increases as the breakdown voltage rises. At a voltage greater than 16 kv no emission lines are present in radiation issuing directly from the channel. Absorption lines of Si are observed to form in the cooler peripheral layer. The brightness of the continuous spectrum is constant at $\lambda > 2.5 \mu\text{m}$. This agrees with the Unsold formula if the continuous spectrum is chiefly formed on account of a broadening of levels. At lesser wave lengths the brightness of the continuous spectrum falls off. At a voltage greater than 16 kv emission lines of Si I, Si II, and Si III are only observed in the radiation of vapors outside the capillary. The temperature near the capillary, as determined from the intensity, amounts to 14,000 K and falls off rapidly at a wavelength of a few millimeters. On raising the

Card 1/2

Translation from Referativnyy Zhurnal Fizika, 1959, Nr 1, p 266 (USSR)

AUTHOR Ovechkin, G.V.

TITLE: An Unusual Manifestation of the Doppler Effect

PERIODICAL: Uch. zap. Belorussk un-t, 1958, Nr 41, pp 127 - 133

ABSTRACT: On studying the emission of a condensed electric discharge in a capillary, the author observed a Dopplershift in the spectral emission lines relative to the absorption lines. These and other lines are formed outside the capillary. However, emission is due to fast atoms, while absorption is mainly due to slow vapors. Accordingly the emission line is narrow, while the absorption line is wide. On augmenting the voltage, the quantity of expelled vapors increases, and the lines manage to be absorbed near the aperture by vapors that have not yet lost their velocity. Under this circumstance the emission lines completely disappear.

L. A. Vaynshteyn

Card 1/1

$$(1) v \in C(H \times \mathbb{R}), \quad (2) v.$$

14(7). 24(0)

10/1/97

FAST

770100

1370257

Stephens, B. S.: Localities 13
NW/30-59-1-9/37

Investigations by Belorussian Scientists in the Field of Spectroscopy and Luminescence (Nabely Belorusskikh uchenykh na optostroypil i lyuminetsentsii)

24(7)

SOV 170-49-4-10-1

AUTHOR: Oveshkin, G.V.

TITLE: A Method of Calculating the Effect of the Third Component on the Relative Intensity of an Analytical Pair of Lines

PERIODICAL: Inzhenerno-fizicheskiy zhurnal, 1959, Nr 6, pp 54-63 USSR

ABSTRACT: It has been discovered experimentally that the relative intensity of an analytical pair of lines, belonging to two components of an alloy, depends upon the presence in the sample studied of a third component. Various investigators advanced different hypotheses to explain the changes observed in the relative intensity. Lomakin [Ref 1] established an experimental relationship between the intensity of emission of a line and the concentration of a given element in the sample. The present investigation was undertaken with an aim to establish the main causes for displacements of graduated graphs, by simplifying the problem on the effect of a third component on the relative intensity of an analytical pair of lines. An analysis of the possible causes was carried out, and main factors affecting displacements of graduated graphs, when a third component was introduced into a sample, were estab-

Card 1/3

SOV/170-59-6-8 25

A Method of Calculating the Effect of the Third Component on the Relative Intensity of an Analytical Pair of Lines

There are 2 graphs and 30 references, 26 of which are Soviet, 4 German and 1 unidentified.

ASSOCIATION: Belorusskiy gosudarstvennyy universitet im. V.I. Lenina (Belarusian State University imeni V.I. Lenin), Minsk.

Card 3/3

05799

17

The Effect of Sodium on the Relative Intensity of an Analytical Pair of Lines of
Magnesium and Copper

of plasma temperature. Using the experimental data obtained the authors
constructed a graph showing the dependence of relative rate of magnesium
and copper evaporation on plasma temperature of the solution. It is shown
in the sample figures.
There are 2 figures and 1 table referred as

ASSOCIATION Belorusskiv gosudarstvennyy universitet im. V. I. Lenina (Belorussian
State University named V. I. Lenin), Minsk

Card 2/

OVECHKIN, G. V.

Method of determining the effect of a third constituent on the
displacement of graduated graphs. Inzh.-fiz.sbur. no.4:37-43
Ap '60. (MIRA 13:8)

1. Belorusskiy gosudarstvennyy universitet im. V.I.Lenina,
Minsk.

(Physics--Graphic methods)

OVECHKIN, G.V.

Method for correcting the relative intensity of analytical pairs
of lines in arc discharge. Zhur.anal.khim. 16 no.5:527-531
S-O '61. (MIRA 14:9)

1. V.I.Lenin Byelorussian State University, Minsk.
(Electric discharges through gases) (Spectrum analysis)

12

OVECHKIN, G.V.

Effect of the third component on the shifting of graduated
graphs of solutions in analyses using an arc. Dokl. AN BSSR
6 no.5:293-296 My '62. (MIDW 15:6)

1. Belorusskiy gosudarstvennyy universitet im. V.I. Lenina.
Predstavleno akademikom AN BSSR M.A. Yel'yashevichem.
(Plasma (Ionized gases))
(Alloys)

OVECHKIN, G.V.

Effect of sodium and zinc on the relative intensity of the analytical pairs of lines of tin and copper in the arc. Zhurnal fiz. khim. 17 no.1:31-38 Ja-F '62. (Minsk 1962)

1. V.I.Lenin Byelorussian State University, Minsk
(Tin--Spectra) (Copper--Spectra)

OVECHKIN, G.V.

Effect of sodium, nickel, and magnesium on the relative intensity
of analytical pairs of lines Mn - Fe, Mn - Cu, and Cu - Fe.
Zhur.anal.khim. 17 no.2:156-165 Mr-Apr '62. (MIRA)

1. V.I.Lenin byelorussian State University, Minsk.
(Metals--Spectra)

OVECHKIN, G.V.

Effect of a supporting electrode material and of a third component on the relative intensity of the analytical pairs of lines of bronze elements. Zhur.anal.khim. 17 no.6:660-664 S '62. (MIRA 16:1)

1. Belorusskiy gosudarstvennyy universitet im. V.I.Lenina, Minsk.
(Bronze—Spectra) (Electrodes)

OVECHKIN, G.V.

Infrared spectra of some penicillins in region 1200-1400 cm⁻¹.
Zhur.ob.khim. 33 no.6:1232-1237 1987. (Minsk)

1. Belorusskiy gosudarstvennyy universitet imeni V.I.Lenina.
(Penicillin--Absorption spectra)

ACCESSION NR: AP4009721

S/0075/64/ 019/001/0043/0047

AUTHOR: Ovechkin, G.V.

TITLE: Light intensity of spectral lines of the plasma of arc and spark discharges in consideration of reabsorption

SOURCE: Zhurnal analiticheskoy khimii, v. 19, no. 1, 1964, 43-47

TOPIC TAGS: radiant energy, spectral lines self absorption, arc discharge plasma, spark discharge plasma, spectral line reversal, plasma layer, plasma luminous cloud, plasma heterogeneity, emission frequency

ABSTRACT: The method suggested by the author for determining the share assumed by reabsorption is contained in a formula (8) derived from the classical formula for emission intensity, namely

$$I_{1j} = n_{1j} \frac{E_{1j}}{E_0} \propto \alpha(1-x) e^{-\frac{E_1}{kT}} \cdot 10^{-P}, \quad (8)$$

Card 1/3

ACCESSION NR: AP4009721

where I_{λ} is the intensity of the atomic spectral lines, h the Planck constant, ν_{λ} the emission frequency during atom transit from the excited state E_1 to a less excited or normal state E_2 , A_{λ} the probability of such transit, g_1 and g_0 the statistical weights of the excited and normal state of the atom respectively, c the concentration of the element under study in the electrode, α a value characterizing the rate at which the element enters the plasma and its diffusion rate in the plasma, x the degree of ionization of the atoms, k the Boltzmann constant, T the plasma temperature; p is the factor added by the author to take into account re-absorption by the outer plasma layer of radiant energy emitted by the adjoining inner layer. The value of p is thus determined by the weakening of the spectral line through self absorption. Formula (8) explains satisfactorily the experimentally determined graphic relation between spectral line emittance and elemental content of the sample established by Lomakin (Tr. Vses. n.-i. in-ta metrologii i standartov. Vyp. 2, 1932, p. 139). Orig. art. has: 4 figures, 12 formulas.

Card 2/3

ACCESSION NR: AP4009721

ASSOCIATION: Belorusskiy gosudarstvennyy universitet im. V.I.
Lenina, Minsk (Belorussian State University)

SUBMITTED: 04Apr63

DATE ACQ: 14Feb64

ENCL: 00

SUB CODE: CH, PH

NO REF SOV: 008

OTHER: 001

Card 3/3

OVECHKIN, G.V.; SANDRYGAYLO, L.Ye.

Effect of the discharge energy and the plasma temperature on the relative intensity of the analytical pairs of lines of zinc and copper. Zhur.anal.khim. 18 no.7:799-807 J1 '63. (MIRA 16:11)

1. V.I.Lening Belorussian State University, Minsk.

KOZLOV, T.I., prepod.; KULICHKOVA, Ye.Ya., prepod.; KURCHENKO, A.I.,
 prepod.; LITVIN, V.I.; MELNEV, A.A.; MOSKOV, A.A.
 OVECHNIK, I.Ye.; PAVLOVICH, I.S.; PLYUSHKIN, A.A.;
 RASHKINSKAYA, N.B.; RYKOVA, I.G.; FROLOV, V.P.; TALENKO,
 I.A.;

[Manual on practical work in the laboratory on the processes
 and apparatus of chemical technology? Sostavleno k prakti-
 cheskim zaniatiyam v laboratorii po protsessam i apparata
 khimicheskoi tekhnologii. Izd. 1, 1971. 104 s. Moskva,
 Khim. izd., 1971. 104 s. (M. A. 1971.)

OVECHKIN, M.I., inzh. (Omsk)

Ductilimeter of simple construction. Stroil. truboprov. 6 no. 2:18-19
F '61. (MIRA 14:5)

(Bituminous materials—Testing)

TSURUTA, Teydzi [TSuruta, Teiji], dots.; OVECHKIN, M.K. [translator];
SERGEYEV, A.I., red.; ROZAYLINA, A.A., red.; KUMAL, V.V.,
tekhn. red.

[Preparation of synthetic polymers] Reaktsii polucheniia
sinteticheskikh polimerov. Pod red. A.I. Sergeeva. Moskva,
Goskhimizdat, 1967. 196 p. Translated from the Japanese.
(M.I.A. 17:1)

1. Inzhenerno-tekhnicheskii fakul'tet Kiotskogo universiteta.
Chlen Obshchestva po issledovaniyu polimerov i chlen Yapon-
skogo khimicheskogo obshchestva (for TSuruta).
(Polymers) (Chemistry, Organic--Synthesis)

L 54720-65

ACCESSION NR: AP5017987

UR/0286/64/000/022/0097/0097

AUTHOR: Berkman, I. L.; Katiukhin, B. P.; Rannev, A. V.; Rustanovich, A. V.;
Spirnov, O. A.; Grushetakiy, Yu. L.; Zhukov, F. N.; Oveshkin, M. M.

TITLE: Accumulator-pump hydraulic drive. Class 84, No. 166609

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 22, 1964, 97

TOPIC TAGS: hydraulic equipment, pump, excavating machinery, civil engineering

Translation: This inventor's certificate introduces an accumulator-pump hydraulic drive for the rotating platform of an excavator with power recovery during braking. The device includes an actuating cylinder and an auxiliary storage cylinder, power pump, hydraulic motor, valve distributor, recovery and filling check valves. In order to assure the necessary pressure in the storage cylinder, to reduce the time for charging the force pump and to simplify the construction, the device includes a packing valve which keeps up the level in the hydraulic motor and controlled safety valves, one of which charges the force pump and the other a blocking valve for all positions of the distributor valve except the neutral position, thus limiting the pressure in the actuating cylinder during braking.

Card 1/2

L 54720-65
ACCESSION NR: AP5017987

ASSOCIATION: Vsesoyuznyy nauchno-issledovatel'skiy institut stroitel'stva i
dorozhnogo mashinostroyeniya (All-Union Scientific Research Institute of Con-
struction and Road Building Machinery)

SUBMITTED: 18Nov63

ENCL: 00

SUB CODE: IE, GO

NO REF SOV: 000

OTHER: 000

JPRS

Card 2/2

20712

S/120/61/000/001/054/062
E032/E114

26.235P

AUTHORS: Umarov, G.Ya., Alimov, A.K., and Ovsachkin, N.F.

TITLE: A Fast Electrodynamical Pulsed Vacuum Valve

PERIODICAL: Pribery i tekhnika eksperimenta, 1961, No.1, pp.178-179

TEXT: The valve is shown in Fig.1. The vacuum region B is separated from the high pressure region A by the elastic steel plate 6 and the polyethylene gasket 7. The valve is hermetically sealed by means of the central screw C. The vacuum cylinder B carries a 5-turn coil 4 made of copper strip $10 \times 2 \text{ mm}^2$. An MM3-100 (IMZ-100) capacitor charged to 2 kV is discharged through this coil. The steel plate 6 carries a copper ring 12 made from 0.2 mm thick foil. The current induced in the steel plate and the copper ring interacts with the current in the coil 4 and opens the valve. The amount of gas admitted to the vacuum chamber can be adjusted to lie between 10^{16} and 10^{19} molecules. The minimum time during which the valve was in the open state was found to be 6 μsec . Acknowledgements are made to V.V. Zhukov and A.M. Andrianov for discussions and valuable advice. There are 3 figures and 1 Soviet reference.
Card 1/2

QVECHKIN, N. F.

S/166/63/000/001/003/010
B104/B186

AUTHORS: Umarov, G. Ya., Alimov, A. K., Qvachkin, N. F.

TITLE: Investigation of a quickly acting electrodynamic pulsed vacuum valve

PERIODICAL: Akademiya nauk Usbezkoy SSR. Investiya. Seriya fiziko-matematicheskikh nauk, no. 1, 1963, 34 - 38

TEXT: An electrodynamic pulsed valve with elastically deformed membrane suited for plasma injectors is described. The main part of this valve is a steel membrane shown in Fig. 1. The discharge current of a condenser passes through the copper coil and interacts with the induction current in the copper ring soldered to the steel membrane. A study of the membrane motion shows that to ensure a rigid construction the membrane has to be screwed on both sides with thick washers; this makes it possible to increase the diameter of the central clamp bolt up to 100 mm, through which the high-voltage lead-in of the electrodynamic gun is taken. The membrane thickness is 2.4 mm and the coil consists of 3 copper bar windings with a thickness of 8 mm. With an increase of the peripheral clamping pressure the minimum opening voltage increases and the time of the opened valve

Card 1/2

Investigation of a quickly ...


8/166/63/000/001/003/010
B104/B186

state decreases at equal voltages and diameter of inner clamp bolt. The time of the open valve state can be adjusted in the range between 20 and 250 μ sec. There are 4 figures.

ASSOCIATION: Fiziko-tekhnicheskiy institut AN UzSSR (Physicotechnical Institute AS UzSSR)

SUBMITTED: June 28, 1962

Fig. 1. Membrane with coil. Legends:
(1) Clamp bolt; (2) peripheral rubber hold-down; (3) pulse coil; (4) teflon sealing.

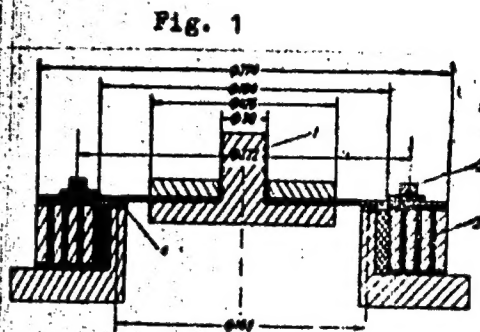

Card 2/2